


ZT320K

Flattop Tower Crane

타워크레인의 구조, 규격 및 성능에 관한 기준
 KS B ISO 12485 ; 2004
 EN 14439 EN 13001
 FEM 1.001 A3 DIN 15018
 GB/T 5031-2008 GB/T 13752-2013

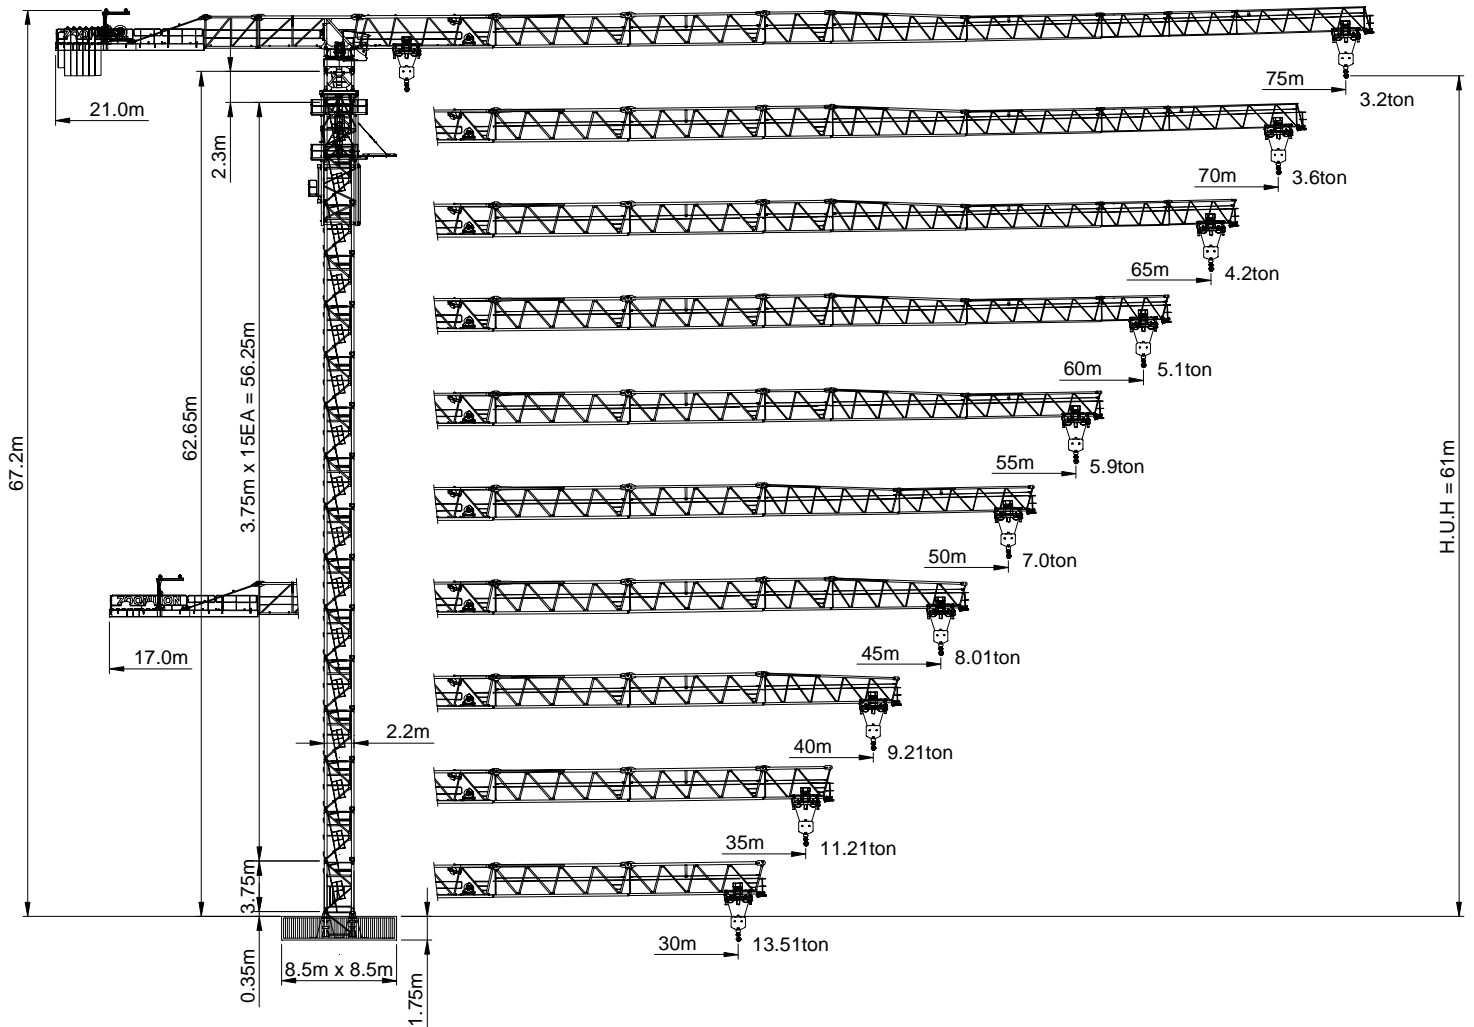

Rev.00

Load capacity

Jib length (m)	fall	Max. capa		15	20	25	30	35	40	45	50	55	60	65	70	75	
		m	ton														
75	2	5.0~37.1	8	8.00					7.31	6.32	5.54	4.90	4.36	3.92	3.53	3.20	
	4	4.0~20.3	16	16.00	12.56	10.12	8.40	7.12	6.13	5.34	4.70	4.17	3.72	3.34	3.01		
70	2	5.0~37.6	8	8.00					7.43	6.43	5.63	4.98	4.44	3.99	3.60		
	4	4.0~20.6	16	16.00	12.75	10.28	8.53	7.24	6.24	5.44	4.79	4.25	3.79	3.41			
65	2	5.0~39.1	8	8.00					7.78	6.74	5.91	5.23	4.67	4.20			
	4	4.0~21.3	16	16.00	13.32	10.74	8.93	7.58	6.54	5.71	5.04	4.48	4.01				
60	2	5.0~41.8	8	8.00					7.31	6.42	5.70	5.10					
	4	4.0~22.8	16	16.00	14.37	11.61	9.67	8.23	7.12	6.23	5.51	4.91					
55	2	5.0~42.9	8	8.00					7.56	6.64	5.90						
	4	4.0~23.4	16	16.00	14.82	11.99	9.99	8.51	7.36	6.45	5.71						
50	2	5.0~44.8	8	8.00					7.95	7.00							
	4	4.0~25.0	16	16.00	15.55	12.59	10.51	8.96	7.76	6.81							
45	2	5.0~45.0	8	8.00													
	4	4.0~25.0	16	16.00	12.97	10.83	9.24	8.01									
40	2	5.0~40.0	8	8.00													
	4	4.0~24.9	16	16.00	15.95	12.93	10.79	9.21									
35	2	5.0~35.0	8	8.00													
	4	4.0~25.7	16	16.00	13.41	11.21											
30	2	5.0~30.0	8	8.00													
	4	4.0~25.9	16	16.00	13.51												

Jib & Counterjib schedule

